



CHARACTERISTICS

- Two component anchoring mortar for anchoring into solid and hollow materials
- Styrene free, can be used in confined spaces
- Suitable for dry, wet and flooded holes
- Suitable for overhead installations (without additional accessories)
- Fast loading time
- Anchoring may be placed close to the edges (see table installation parameters)
- Can be applied with a standard cartridge gun

APPLICATIONS

- Can be used for medium load anchoring applications in hollow and solid materials.
- Can be used in hollow materials: hollow masonry and voided stone.
- Can be used in solid materials: concrete, solid masonry, rock, hard natural stone.
- For fixing roller shutters, staircase hand rails, sun protection, canopies, boilers, racking, bicycle racks, masonry supports, signs, safety barriers, balcony fences, satellite dishes...
- Suitable for anchoring on small surfaces.

TECHNICAL CHARACTERISTICS	
Type of product	Polyester
Mixing ratio	10:1
Curing system	2-component chemical reaction
Packaging	Flexible pocket with 2 compartments for component A and component B contained in a single-piston cartridge
Working time	See table
Loading time	See table
Minimum resin cartridge temperature	+5°C
Temperature of base material	+5°C - +30°C
Minimum service temperature	-40°C
Maximum service temperature	Long term (>12h): +50°C Short term (<12h): +80°C
Threaded rod sizes in uncracked concrete	M8 - M10 - M12 - M16
Threaded rod sizes in masonry	M6 - M8 - M10 - M12
Shelf life, in the original packing in upside position, out of direct sunlight and in dry conditions between +5°C - +25°C	12 months

PACKING AND COLOUR
12 cartridges of 300 ml/box - 95 boxes/pallet (1140 cartridges)
Beige

Necessary accessories


- Standard applicator gun (manual, pneumatic or electric)
- Static mixing nozzle (1 piece included per cartridge)
- Cleansing blowing pump
- Cleansing brush
- Sieve sleeve (in case of hollow materials)

This technical data sheet replaces all previous editions. The data on this sheet have been drafted according to the last state of the laboratory data. Technical characteristics can be changed or adapted. We are not responsible in case of incompleteness. Before usage, one needs to ensure that the product is suitable for its application. Therefore, tests are necessary. Our general conditions apply.

METHOD OF USE

Application in solid or hollow substrate

1. Drill the hole to the correct diameter and depth.
2. Thoroughly **clean the hole** in the following sequence:
For solid materials: blow clean x2, then brush clean x2, then blow clean x2.
For hollow materials: brush clean 1x, then blow clean x1.
Note: use a brush with the required extensions and a source of clean compressed air. For holes of 400 mm or less deep, a blow pump may be used. The resin should be injected into a properly cleaned hole. Remove standing water before cleaning.
3. In case of hollow or perforated brick masonry: **insert the correct sieve sleeve**.
4. Once the hole is prepared, open the cartridge and screw **mixing nozzle** onto the mouth of the cartridge. Insert the cartridge into the sealant gun.
5. Extrude the first part of the cartridge to waste until an **even colour** is achieved, without streaking in the extruded product.

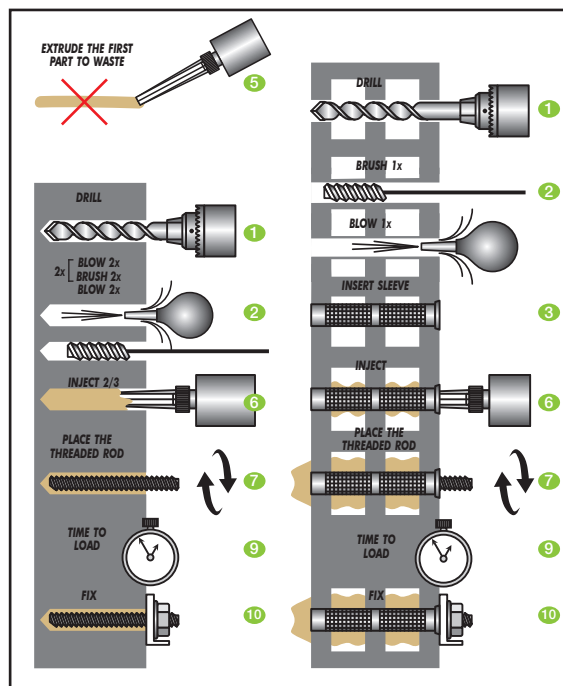

6. **Insert the mixing nozzle** to the bottom of the hole or the sleeve. Begin to extrude the product and slowly withdraw the mixer nozzle from the hole or the plug ensuring that there are no air voids as the mixer nozzle is withdrawn. For solid materials: fill the hole to approximately $\frac{1}{2}$ to $\frac{3}{4}$ full and withdraw the nozzle completely. For hollow materials: completely fill the sleeve with resin.
7. Immediately **insert the clean threaded rod** (free from oil or other release agents) to the bottom of the hole using a back and forth twisting motion ensuring all the threads are thoroughly coated. Adjust to the correct position within the stated working time (see table).
8. Any **excess product** will be expelled from the hole evenly around the steel element showing that the hole is full. This excess product should be removed from around the mouth of the hole before it sets.
9. Leave the anchor to cure. **Do not disturb the anchor until the appropriate loading time has elapsed** (depending on the substrate conditions and ambient temperature).
10. Load with force after curing of the resin. Attach the fixture and tighten the nut to the recommended torque. Do not over-tighten.
11. Leave the static mixing nozzle on the cartridge and change with new one just before the next application.

Working and loading times

Temperature of resin cartridge and base material	Working time	Loading time (minimum time required until load can be applied)
+5°C	18 min.	160 min.
+5°C » +10°C	10 min.	160 min.
+10°C » +20°C	6 min.	90 min.
+20°C » +25°C	5 min.	60 min.
+25°C » +30°C	4 min.	50 min.
+30°C	4 min.	40 min.

T work is typical gel time at highest temperature. T load is set at the lowest temperature.

This technical data sheet replaces all previous editions. The data on this sheet have been drafted according to the last state of the laboratory data. Technical characteristics can be changed or adapted. We are not responsible in case of incompleteness. Before usage, one needs to ensure that the product is suitable for its application. Therefore, tests are necessary. Our general conditions apply.

USE IN NON-CRACKED CONCRETE



Installation parameters

Threaded rod		M8	M10	M12	M16
Size of threaded rod	d (mm)	8	10	12	16
Nominal drill hole diameter	d _o (mm)	10	12	14	18
Diameter of cleaning brush	d _b (mm)	14	14	20	20
Torque moment	T _{inst} (Nm)	10	20	40	80
Depth of drill hole for h _{ef} min/h _{ef} max	h _{ef} (mm)	64/96	80/120	96/144	128/192
Minimum edge distance	c _{min} (mm)	35	40	50	70
Minimum spacing	s _{min} (mm)	40	40	50	70
Minimum thickness of base material	h _{min} (mm)	h _{ef} + 30 mm ≥ 100 mm			h _{ef} + 2 d _o

Theoretical consumption*

	Drill hole diameter d _o (mm)	Embedment depth h _{ef} min/standard/max (mm)	Number of applications per cartridge (# of drill holes)
M8	10	64	100
		80	80
		96	66
M10	12	80	55
		90	49
		120	37
M12	14	96	34
		110	30
		144	23
M16	18	128	15
		128	15
		192	10

*Consumption based on 60% filling rate of drill hole.

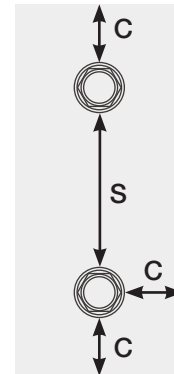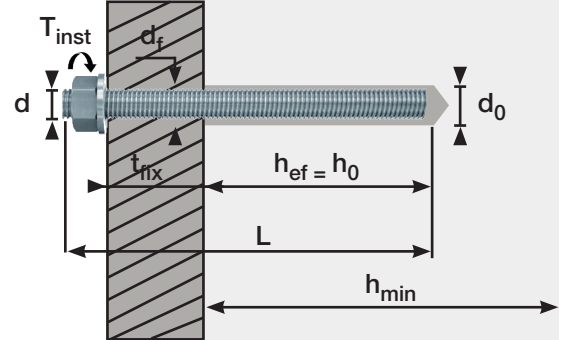

Characteristic bond resistance for combined pullout and concrete cone failure in C20/25 uncracked concrete

		M8	M10	M12	M16
Temperature T1: -40°C to +40°C	T _{Rk uncr} (N/mm ²)	6.4	5.9	5.7	5.0
Temperature T2: -40°C to +80°C	T _{Rk uncr} (N/mm ²)	5.8	5.4	4.6	4.1
Safety factor dry/wet concrete	γ _{Mp} (-)	1.8			
Safety factor for flooded holes	γ _{Mp} (-)	2.1			
Factor for concrete	Ψ _c C25/30	1.02			
Factor for concrete	Ψ _c C30/37	1.04			
Factor for concrete	Ψ _c C35/45	1.06			
Factor for concrete	Ψ _c C40/50	1.07			
Factor for concrete	Ψ _c C45/55	1.08			
Factor for concrete	Ψ _c C50/60	1.09			

This technical data sheet replaces all previous editions. The data on this sheet have been drafted according to the last state of the laboratory data. Technical characteristics can be changed or adapted. We are not responsible in case of incompleteness. Before usage, one needs to ensure that the product is suitable for its application. Therefore, tests are necessary. Our general conditions apply.

Resistance values for threaded rod in uncracked concrete

Combined pullout & concrete cone failure and concrete cone failure (Temperature range: -40°C till +40°C)

Property		M8	M10	M12	M16
Effective embedment depth = 8 d	h_{ef} (mm)	64	80	96	128
Design Resistance	NRd (kN)	5.5	8.0	11.0	17.5
Effective embedment depth = STD	h_{ef} (mm)	80	90	110	128
Design Resistance	NRd (kN)	7.0	9.0	13.0	17.5
Effective embedment depth = 12d	h_{ef} (mm)	96	120	144	192
Design Resistance	NRd (kN)	8.5	12.0	17.0	26.5

- Resistance values are based on combined pullout & concrete cone failure and concrete cone failure according to EC2-4 design. Resistance for steel failure must also be considered - the lowest value controls.
- Resistance values are for single anchors without close edges or eccentric loading considerations.
- Tabulated values correspond to the above stated temperature range and installation conditions only.
- Long term temperatures are those that remain roughly constant over prolonged periods. Short term temperatures occur over brief intervals, e.g.: diurnal cycling.
- The concrete is assumed dry and its compressive strength (f_{ck} , cylinder) is assumed to be 20N/mm².
- Tabulated resistance values assume that the geometry of the anchor(s) and concrete member is sufficient to avoid splitting failure.

USE IN MASONRY

Installation parameters in hollow masonry with sieve sleeve

Threaded rod		M6	M8	M8	M10	M12
Size of threaded rod	d (mm)	6	8	8	10	12
Sieve sleeve length	l_s (mm)	80	80	85	85	85
Sieve sleeve diameter	d_s (mm)	12	12	16	16	16
Nominal drill hole diameter	d_o (mm)	12	12	16	16	16
Diameter of cleaning brush	d_b (mm)	14 ^{±1}	14 ^{±1}	20 ^{±1}	20 ^{±1}	20 ^{±1}
Depth of drill hole	h_o (mm)	85		90		
Effective anchorage depth	h_{ef} (mm)	80		85		
Diameter of clearance hole in the fixture	$d_f \leq$ (mm)	7	9	9	12	14
Torque moment	$T_{inst} \leq$ (Nm)	2				




Installation parameters in solid masonry without sieve sleeve

Threaded rod		M6	M8	M10	M12
Size of threaded rod	d (mm)	6	8	10	12
Nominal drill hole diameter	d_o (mm)	8	10	12	14
Diameter of cleaning brush	d_b (mm)	9 ^{±1}	14 ^{±1}	14 ^{±1}	14 ^{±1}
Depth of drill hole	h_o (mm)	80	90		
Effective anchorage depth	h_{ef} (mm)	80	90		
Diameter of clearance hole in the fixture	$d_f \leq$ (mm)	7	9	12	14
Torque moment	$T_{inst} \leq$ (Nm)	2			

Theoretical consumption

This technical data sheet replaces all previous editions. The data on this sheet have been drafted according to the last state of the laboratory data. Technical characteristics can be changed or adapted. We are not responsible in case of incompleteness. Before usage, one needs to ensure that the product is suitable for its application. Therefore, tests are necessary. Our general conditions apply.

Types and dimensions of blocks and bricks

<p>Brick no. 1</p>  <p>Hollow clay brick Perforado 10 according to EN771-1 Length/width/height 245 mm/110 mm/100 mm $f_b \geq 15 \text{ N/mm}^2$ / $\rho \geq 2.05 \text{ kg/dm}^3$</p>	<p>Brick no. 2</p>  <p>Hollow clay brick Porotherm P+W according to EN771-1 Length/width/height 373 mm/250 mm/238 mm $f_b \geq 12 \text{ N/mm}^2$ / $\rho \geq 0,9 \text{ kg/dm}^3$</p>	<p>Brick no. 3</p>  <p>Solid clay brick Mz-NF according to EN771-1 Length/width/height 240 mm/116 mm/71 mm $f_b \geq 20 \text{ N/mm}^2$ / $\rho \geq 1.9 \text{ kg/dm}^3$</p>
--	--	--

SAFETY



Safety data sheet available on request.

POINTS OF ATTENTION

- Due to the nature of the product, migration of the monomer in the resin may cause staining in certain materials (f. ex. natural stone). Preliminary tests are necessary.
- Not intended for anchoring into porous or reconstituted stone.
- The chemical anchor is not intended for use as a cosmetic or decorative product.
- Not intended for anchoring into holes flooded with seawater.

TECHNICAL APPROVALS

- ETA 25/0290 according to EAD 330076-01-0604 M8 – M12. For fastening and/or support to masonry, load-bearing elements (that contribute to the stability of the structure), or heavy components.
- ETA 25/0289 according to EAD 330499-02-0601 M8 – M16. For fastening and/or support to concrete, load-bearing elements (that contribute to the stability of the structure), or heavy components.
- A+

	 1020 25 - DL Chemicals nv
European Technical Assessment Parachim Standard No. 1020 - CPR - 090-065385	European Technical Assessment Parachim Standard No. 1020 - CPR - 090-065387
ETA 25/0289 EAD 330499-02-0601 M8 - M16	ETA 25/ 0290 EAD 330076-01-0604 M6 - M12
Bonded injection type anchor for use in uncracked concrete	Injection anchors for use in masonry
DoP nr: MP0240005	



* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

This technical data sheet replaces all previous editions. The data on this sheet have been drafted according to the last state of the laboratory data. Technical characteristics can be changed or adapted. We are not responsible in case of incompleteness. Before usage, one needs to ensure that the product is suitable for its application. Therefore, tests are necessary. Our general conditions apply.