


CHARACTERISTICS

- Polyurethane mousse tape
- Open-cell
- One-sided adhesive

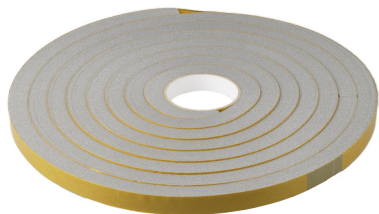

APPLICATIONS

- Is used as backfilling

TECHNICAL CHARACTERISTICS

Full final strength (hours)	0.03
Resistance to compression: NFT 56110	25%: 3,5 kPa 40%: 4,0 kPa 50%: 4,5 kPa 65%: 7,0 kPa
Tensile strength: NFT 56108 (kPa)	120
Maximum elongation: NFT 56108 (%)	200
Tear resistance: NFT 56109 (N/m)	700
Shelf life of unopened product	12 months

PACKING AND COLOURS

Anthracite grey
10 x 10 mm : 80 x roll 10M/box - 2000 pieces/pallet
15 x 15 mm : 35 x roll 10M/box - 875 pieces/pallet

This technical data sheet replaces all previous editions. The data on this sheet have been compiled according to the last laboratory report. Technical characteristics can be changed or adapted. We are not responsible for any incomplete information. Before use, one needs to ensure that the product is suitable for his application. Therefore, tests are necessary. Our general conditions apply