

Technical data sheet

PARABAND EPDM

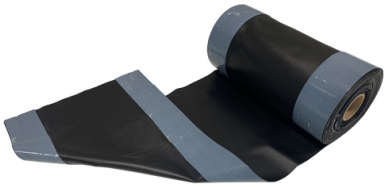

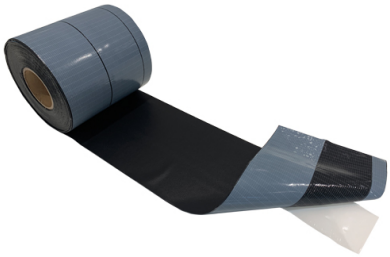

CHARACTERISTICS

- The self-adhesive mounting strip allows very easy, completely concealed installation of the film tape.
- Stretchable
- Paraband EPDM is an elastomeric film based on EPDM for the waterproof, airtight and vapor-tight finishing of building elements.

APPLICATIONS

- Suitable for renovation and new building work.
- Suitable for use around curtain walls, on steel façades, for gutter renovation, external wall insulation, and sealing of window frames.

TECHNICAL CHARACTERISTICS	
Type of product	EPDM membrane
% Elongation at break longitudinal / transverse: EN12311	>= 300%
Resistance To Water Vapor Diffusion	50.000 u (EN 1931)
Thickness: DIN 53855 (mm)	0.75
Weather / UV resistance	unlimited
Tensile strength (N/mm²)	7 N/mm² (EN 12311-2)
Application temperature	+5°C - +40°C
Temperature resistance	-40°C - +120°C
Weight	folie: 0,713 kg/m² (EN 1819-2)
Tear Resistance (N/mm²)	> 10N/mm² (EN 12310-2)
Fire class: EN11925-2 + EN13501-1	E
Nature Of The Adhesive	Acrylaatdispersie zonder oplosmiddelen
Weight Of The Adhesive	230 g/m²
Thickness Of The Adhesive	+- 0,23 mm
Adhesive Strength	>= 28N/25mm (DIN EN 1939(2003))
Temperature Resistance Of The Adhesive	-40°C - +100°C
Shelf life of unopened product	240 months
Storage conditions	Store in a dry, cool place at +5°C to +25°C. Keep out of direct sunlight.

PACKING AND COLOURS
Black
100 mm : 6 x roll 25M/box - 360 pieces/pallet
150 mm : 4 x roll 25M/box - 240 pieces/pallet
200 mm : 4 x roll 25M/box - 192 pieces/pallet
250 mm : 2 x roll 25M/box - 120 pieces/pallet
300 mm : 2 x roll 25M/box - 120 pieces/pallet

This technical data sheet replaces all previous editions. The data on this sheet have been compiled according to the last laboratory report. Technical characteristics can be changed or adapted. We are not responsible for any incomplete information. Before use, one needs to ensure that the product is suitable for his application. Therefore, tests are necessary. Our general conditions apply

DL CHEMICALS Since 1936 Manufacturer of Sealants

DL Chemicals nv
Roterijstraat 201-203 - Zone 5 Snepbeek - 8793 Waregem - Belgium
T +32 56 62 70 51 - F +32 56 60 95 68
info@dl-chem.com - **www.dl-chem.com**

Last Update: 12-11-2026

METHOD OF USE

Preparation

- The surface should be permanently dry, clean and free from dust, paint, loose parts.... and must retain its pressure and form. Check whether surface complies with the applicable norms and technical regulations.

Application

- When installing around joinery always apply the roof tile principle (start at the bottom, then the sides, and finally the top).
- Remove the narrow protective film and attach it to the joinery.
- Remove the adjoining parts so that a connection is made with the structural shell.
- Corner finishing by making a cut from the outer free corner to the inner corner at 45°.
- Press the whole surface with a hard pressure roller.
- Check the adhesion after 30 minutes; if the adhesion is insufficient, use a primer.

Cleaning

- Residue adhesive can be removed with Parasilico Cleaner. The skin can be cleaned with soap and water.

POINTS OF ATTENTION

- On porous substrates a recommended width of 8 cm applies.
- Do not use at joints where there is a risk of standing water on the adhesive layer, for example on balconies, terraces or galleries.
- The product is only suitable for applications above ground level.

This technical data sheet replaces all previous editions. The data on this sheet have been compiled according to the last laboratory report. Technical characteristics can be changed or adapted. We are not responsible for any incomplete information. Before use, one needs to ensure that the product is suitable for his application. Therefore, tests are necessary. Our general conditions apply

DL Chemicals nv
Roterijstraat 201-203 - Zone 5 Snepbeek - 8793 Waregem - Belgium
T +32 56 62 70 51 - F +32 56 60 95 68
info@dl-chem.com - **www.dl-chem.com**

Last Update: 12-11-2026